MiniKlassik stainless steel perforated grate









Product Features

- Certified to EN 1433 Load Class A 3,500 lbs 70 psi
- Grates do not lock down
- Suitable for use with KS50
- Manufactured from 14 gauge, grade 304 stainless steel
- Complies with ADA American Disabilities Act of 1990 Section 4.5.4
- Complies with ASME: A112.6.3 2001: Section 7.12 Heel Resistant Strainers and Grates

Bicycle Tire Penetration Resistant to AS3996-2006



Specifications

General

The surface drainage system shall be ACO Drain MiniKlassik K50* or KS50* channels complete with ACO MiniKlassik stainless steel perforated grate as manufactured by ACO, Inc. or similar approved.

The covers shall be manufactured from stainless steel and have **minimum** properties as follows:

- . Independently certified to meet Load Class A to EN 1433 - 3,500 lbs - 70 psi
- 14 gauge, Grade 304 stainless steel
- Intake area of 14.5 sq. in. (93.5 cm²) per meter grate

The overall width of 2.95" (75mm) and overall length of 39.37" (1000mm). Perforations measure 0.23" (5.84mm) in diameter.

Installation

The trench drain system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations.

* delete as appropriate






MiniKlassik - Longitudinal stainless steel grate (ADA)





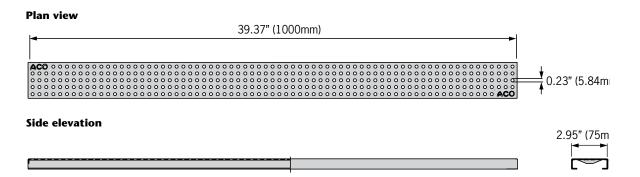

Description	Part No.	Length inches (mm)	Width inches <i>(mm)</i>	Weight lbs.
MiniKlassik Stainless steel perforated grate	95165	39.37 (1000)	2.95 (75)	4.0

ACO, Inc. **Northeast Sales Office** 9470 Pinecone Drive Mentor, OH 44060

Tel: (440) 639-7230 Toll free: (800) 543-4764 Fax: (440) 639-7235

West Sales Office

825 W. Beechcraft St. Casa Grande, AZ 85122 Tel: (520) 421-9988 Toll Free: (888) 490-9552 Fax: (520) 421-9899

Southeast Sales Office

4211 Pleasant Road Fort Mill, SC 29708 Toll free: (800) 543-4764 Fax: (803) 802-1063



Electronic Contact: info@ACODrain.us www.ACODrain.us



© April 2018, ACO, Inc. This information is believed to be accurate but it is not guaranteed to be so. We cannot assume liability for results that buyer obtains with our product since conditions of use are beyond the control of the company. It is the customer's responsibility to evaluate suitability and safety of product for his own use. ACO, Inc. reserves the right to change the product and specifications without notice.