


### Product Features

- Certified to EN 1433 Load Class A - 3,500 lbs - 70 psi
- Uses 'DrainLok' boltless locking system
- Suitable for use with K50/KS50
- Manufactured from 16 gauge, grade 304 stainless steel
- Complies with ADA - American Disabilities Act of 1990 Section 4.5.4
- Complies with ASME: A112.6.3 - 2001: Section 7.12  
Heel Resistant Strainers and Grates
- Bicycle Tire Penetration Resistant to AS3996-2006

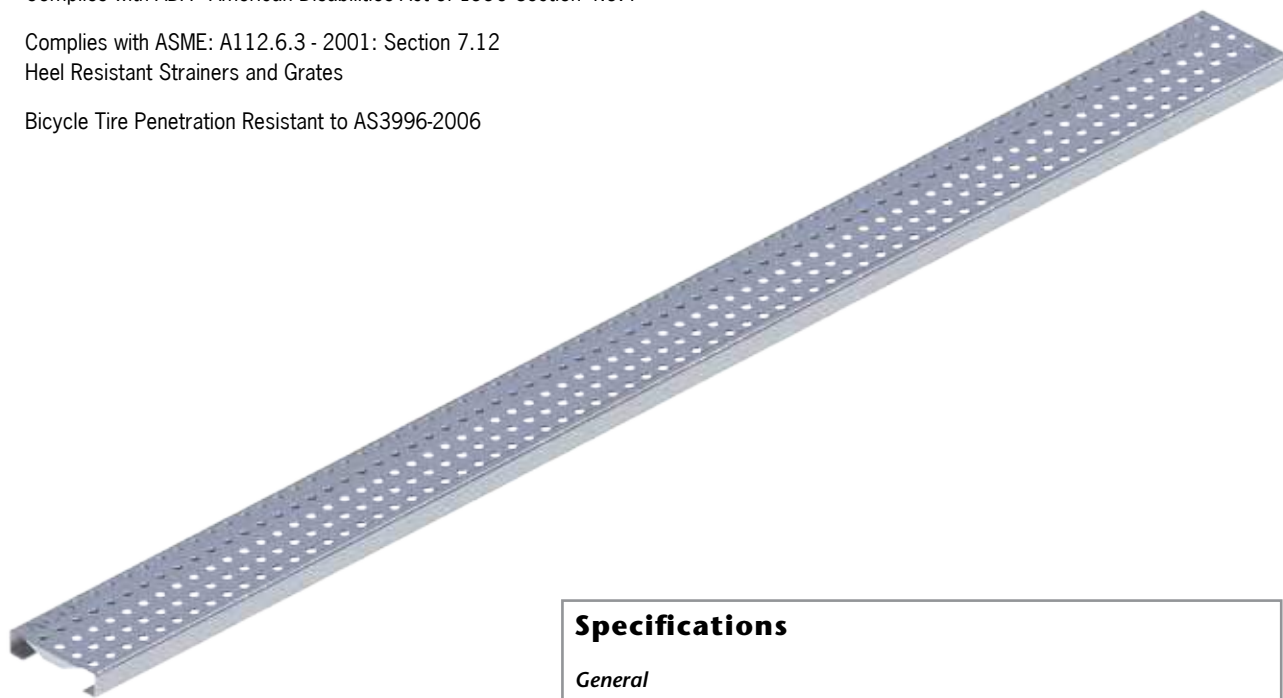

### Specifications

#### General

The surface drainage system shall be ACO Drain MiniKlassik K50/KS50 channels complete with ACO MiniKlassik stainless steel perforated grate as manufactured by ACO Polymer Products, Inc. or similar approved.

#### Materials

The covers shall be manufactured from stainless steel and have **minimum** properties as follows:

- **Independently certified to meet Load Class A to EN 1433 - 3,500 lbs - 70 psi**
- **16 gauge, grade 304 stainless steel**
- **Intake area of 14.5 sq. in. (93.5 cm<sup>2</sup>) per meter grate**

The overall width of 2.89" and overall length of 39.37". Perforations measure 0.23" (5.84mm) in diameter.

#### Installation


The trench drain system and grates shall be installed in accordance with the manufacturer's installation instructions and recommendations.

**ACO DRAIN**


**Type 251D MiniKlassik stainless steel perforated grate (ADA)**



**Plan view**

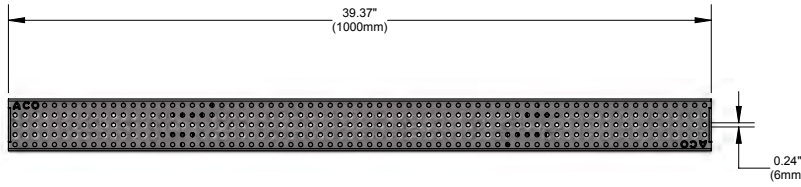


**Side elevation**



Description	Part No.	Length inches (mm)	Width inches (mm)	Weight lbs.
Type 251D MiniKlassik Stainless steel perforated grate	<b>138101</b>	39.37 (1000)	2.89 (73.4)	4.0

**'DrainLok' locking mechanism**



ACO DrainLok™ is a patented, boltless locking system that removes the need for bolts and bars and improves the hydraulic capacity of the channel. The DrainLok™ mechanism simply clips into the channel edge rail for rapid installation. ACO DrainLok™ grates are fitted with an anti-shunt mechanism that restricts unwanted grate movement when installed, improving durability and longevity of the system.

**ACO Polymer Products, Inc.**  
**Northeast Sales Office**  
 9470 Pinecone Drive  
 Mentor, OH 44060  
 Tel: (440) 639-7230  
 Toll free: (800) 543-4764  
 Fax: (440) 639-7235

**West Sales Office**  
 825 W. Beechcraft St.  
 Casa Grande, AZ 85122  
 Tel: (520) 421-9988  
 Toll Free: (888) 490-9552  
 Fax: (520) 421-9899

**Southeast Sales Office**  
 4211 Pleasant Road  
 Fort Mill, SC 29708  
 Toll free: (800) 543-4764  
 Fax: (803) 802-1063



**Electronic Contact:**  
 info@ACODrain.us  
 www.ACODrain.us

